



DIN 69871/A



GS/NCL - Mandrino a compensazione assiale in compressione e trazione
 GS/NCL - Quick-change tapping chuck with compensation in compression and tension

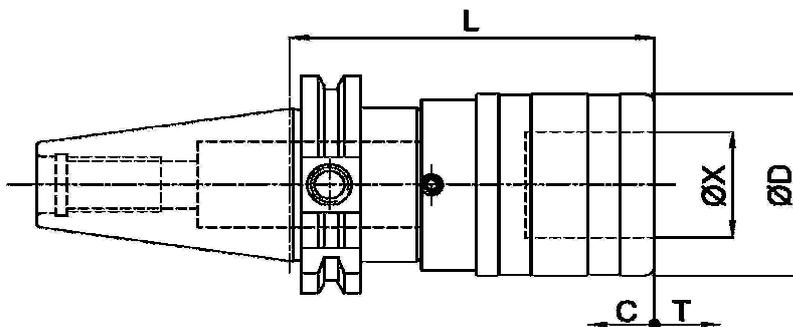

CODICE	C T		TIPO CAPACITA'	ATTACCO	ØX	ØD	L		
	-	+							
TC40-THTC0-L94	6,5	6,5	0 - M1÷M10	ISO 40	13	26	94		
TC50-THTC0-L104				ISO 50			104		
TC40-THTC1-L59	7,5	7,5	1 - M3÷M12	ISO 40	19	36	59		
TC45-THTC1-L74				ISO 45			74		
TC50-THTC1-L74				ISO 50					
TC40-THTC2-L98	12,5	12,5	2 - M8÷M20	ISO 40	31	53	98		
TC45-THTC2-L98				ISO 45					
TC50-THTC2-L98				ISO 50					
TC40-THTC3-L169	20	20	3 - M14÷M33	ISO 40	48	78	169		
TC45-THTC3-L159				ISO 45			159		
TC50-THTC3-L159				ISO 50					
TC40-THTC4-L185	22,5	22,5	4 - M22÷M48	ISO 40	60	96	185		
TC45-THTC4-L175				ISO 45			175		
TC50-THTC4-L175				ISO 50					

